


⚠ WARNING	
	<p style="text-align: center;">ELECTROCUTION HAZARD</p> <p>Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.</p>
	<p style="text-align: center;">FIRE HAZARD</p> <p>Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.</p>

SPECIFICATIONS:


INPUT:	115V, 50/60Hz
OUTPUT:	SEE SCHEMATICS
INSULATION RATING:	CLASS A (105° C)
TEMPERATURE RISE:	65° C RISE ABOVE 40° C AMBIENT
DIELECTRIC STRENGTH:	1500VRMS

NOTE:


- All leads #22 AWG, 6" long minimum, stripped and tinned 3/8".
- Unit Wt. - 6.2 Lbs.

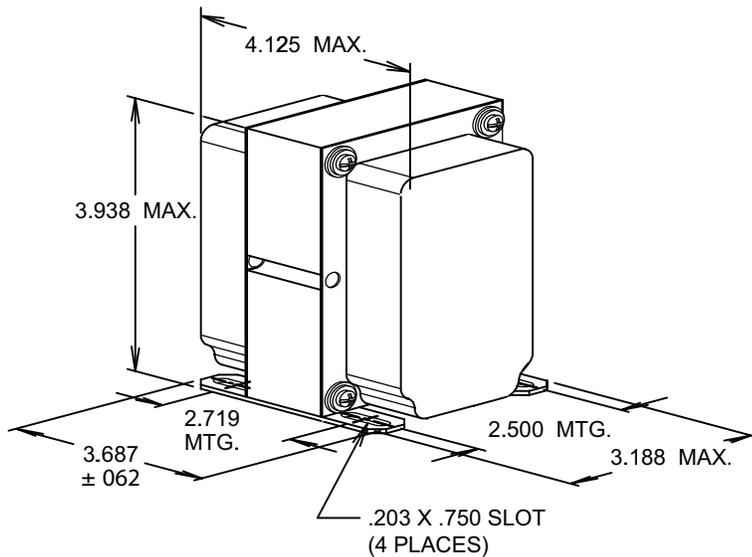

Individual Secondaries

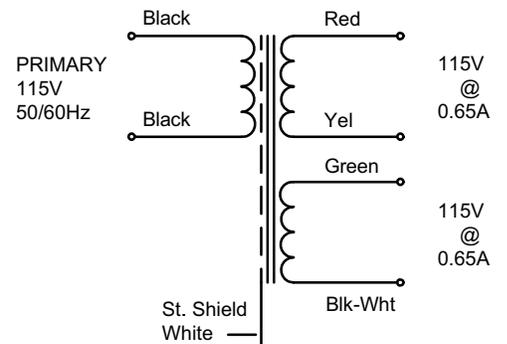

Secondaries in Series

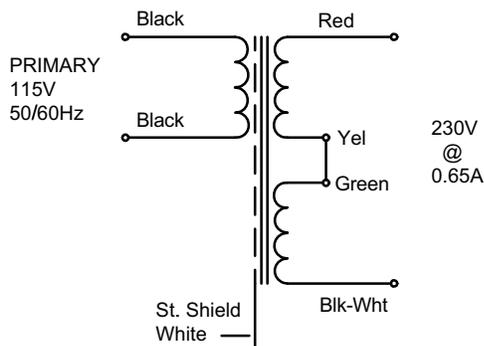

Secondaries in Parallel

