





⚠ WARNING	
	<p style="text-align: center;">ELECTROCUTION HAZARD</p> <p>Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.</p>
	<p style="text-align: center;">FIRE HAZARD</p> <p>Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.</p>

SPECIFICATIONS:

INPUT:	115V, 50/60Hz
OUTPUT:	24V (SEE SECONDARY CURRENT RATING & VA CAPACITY IN TABLE)
INSULATION RATING:	CLASS A (105°C)
TEMPERATURE RISE:	65°C RISE ABOVE 40°C AMBIENT
DIELECTRIC STRENGTH:	1500 VRMS

NOTE:

- All leads #22 AWG, 6" minimum length.

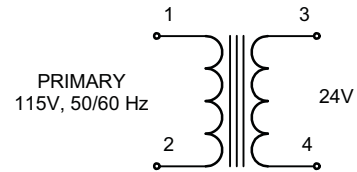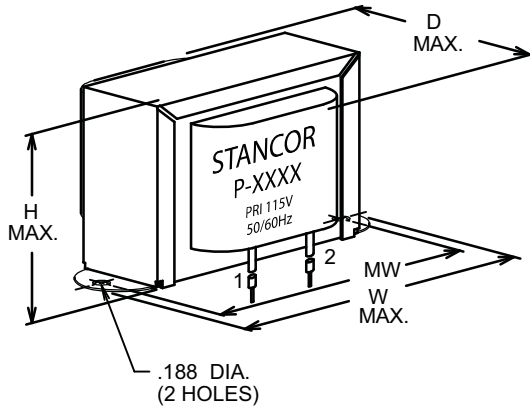

SCHMATIC DIAGRAM

STANCOR Part Number	Pri. Volts	Mtg. Style	Sec. Curr.	V.A. Cap.	Dimensions - Inches				Wt. Lbs.	Primary Leads Color	Secondary Leads Color
					H	W	D	MW			
P-8551	115	A	1.0A	24	2.06	3.31	2.25	2.81	1.40	BLACK	RED
P-8694	115	A	2.0A	48	2.69	4.06	2.19	3.56	2.30	BLACK	BLUE