



<b>⚠ WARNING</b>	
	<p><b>ELECTROCUTION HAZARD</b></p> <p>Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.</p>
	<p><b>FIRE HAZARD</b></p> <p>Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.</p>

### SPECIFICATIONS:

INPUT:	115 / 230V, 50/60Hz
OUTPUT:	25.2 V CT @ 2A
INSULATION RATING:	Class A (105°C)
TEMPERATURE RISE:	65°C Rise above 40°C ambient
DIELECTRIC STRENGTH:	1500V RMS
AGENCY:	UL Recognized for use in the US and Canada per UL506
FILE NUMBER:	E68100

### NOTE:

1. All leads #20 AWG, 6" minimum length.
2. Unit Wt. - 2.2 Lbs.

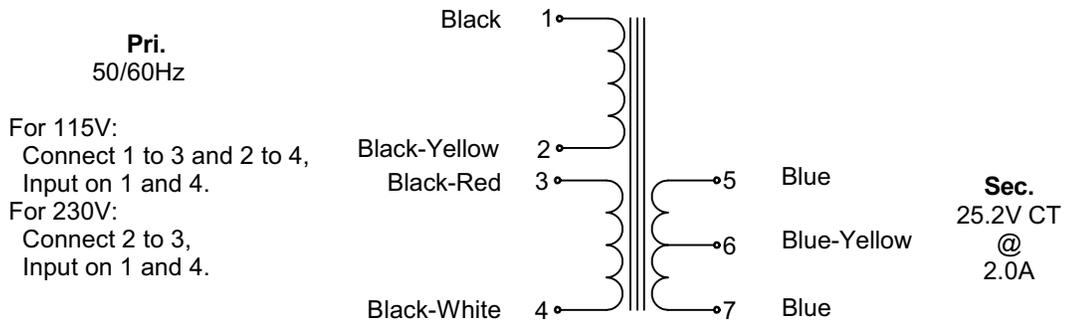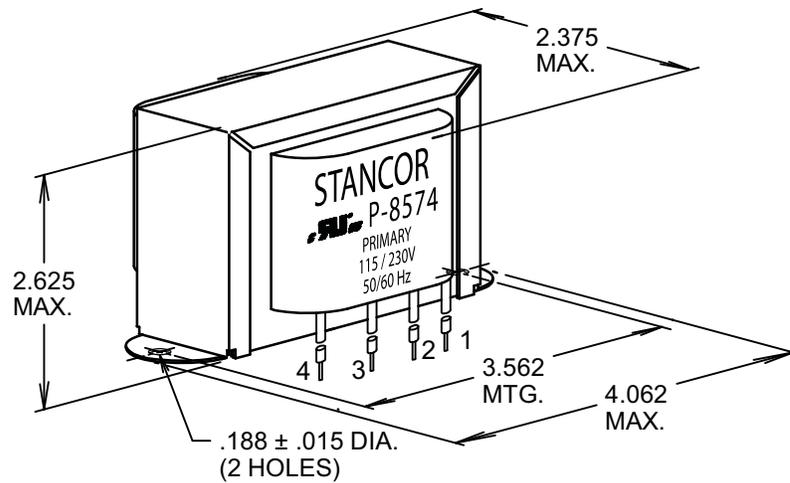

**SCHEMATIC DIAGRAM**