



| <b>⚠ WARNING</b>  |   |
|---|---|
|  | <p style="text-align: center;"><b>ELECTROCUTION HAZARD</b></p> <p>Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.</p> |
|  | <p style="text-align: center;"><b>FIRE HAZARD</b></p> <p>Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.</p>                                     |

### SPECIFICATIONS:

|                      |                              |
|----------------------|------------------------------|
| INPUT:               | 115 / 230V, 50/60Hz          |
| OUTPUT:              | 24 V CT @ 1A                 |
| INSULATION RATING:   | Class A (105°C)              |
| TEMPERATURE RISE:    | 65°C Rise above 40°C ambient |
| DIELECTRIC STRENGTH: | 1500V RMS                    |
| AGENCY:              | UL Recognized per UL506      |
| FILE NUMBER:         | E68100                       |

### NOTE:

1. All leads #22 AWG, 6" minimum length.
2. Unit Wt. - 1.3 Lbs

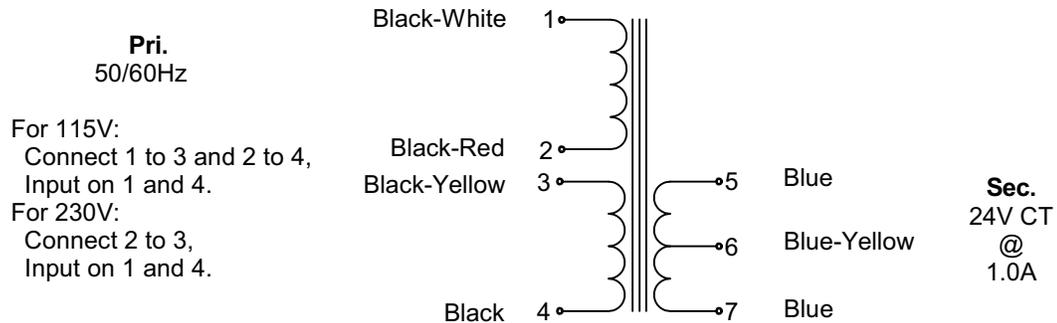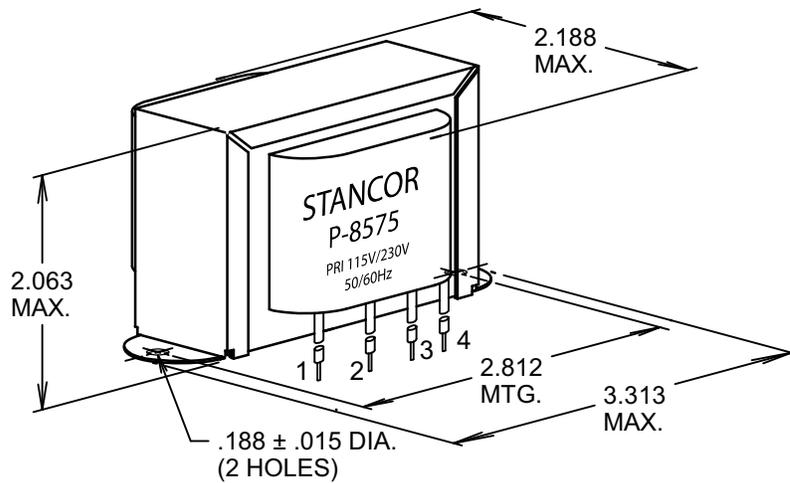

**SCHEMATIC DIAGRAM**